

Material No.: Code:

1.2311 40CrMnNiMo8-6-4

DE - Brand:

MCM

In the DIN EN ISO 4957 the grades 1.2311 (AISI P20), 1.2312 (AISI P20+S) and 1.2738 (AISI P20+Ni) covered by the above mentioned code were amalgamated. The grade 1.2311 does not contain additional quantities of Sulphur or Nickel

Chemical composition:
(Typical analysis in %)

C	Mn	Cr	Mo				
0,40	1,50	1,90	0,20				

Steel properties:

Plastic mould steel that is usually supplied in a quenched and tempered condition. Good machinability, better polishability, compared to 1.2312 (AISI P20+S). Similar to AISI P20.

Applications:

Plastic moulds, frames for plastic pressure dies, hydro-forming tools.

Condition of delivery:

Quenched and tempered, 280 - 325 HB
(950 - 1100 N/mm² according to DIN EN ISO 18265 Table A.1)


Physical properties:

Thermal expansion coefficient	$\left[\frac{10^{-6} \cdot \text{m}}{\text{m} \cdot \text{K}} \right]$	20-100°C	20-200°C	20-300°C	20-400°C
		12,1	12,7	13,2	13,6
Thermal conductivity	$\left[\frac{\text{W}}{\text{m} \cdot \text{K}} \right]$	20°C	350°C		
		34,5	34,2		


Heat treatment:

Soft annealing	Temperature	Cooling	Hardness
	710 - 740°C	furnace	max. 235 HB
Stress relief annealing The recommendation 500 - 550°C is valid for quenched and tempered condition. In the soft annealed condition stress relieving between 600 - 650°C is possible.	Temperature	Cooling	
	500 - 550°C	furnace	
Hardening	Temperature	Cooling	Tempering
	830 - 870°C	oil or hot bath 180 - 220°C	see tempering diagram


(1.2311) Thermal Cycle Diagram

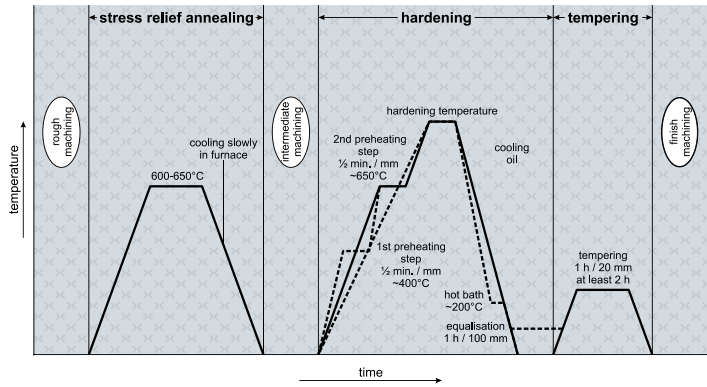

Continuous Cooling Transformation Diagram (CCT)

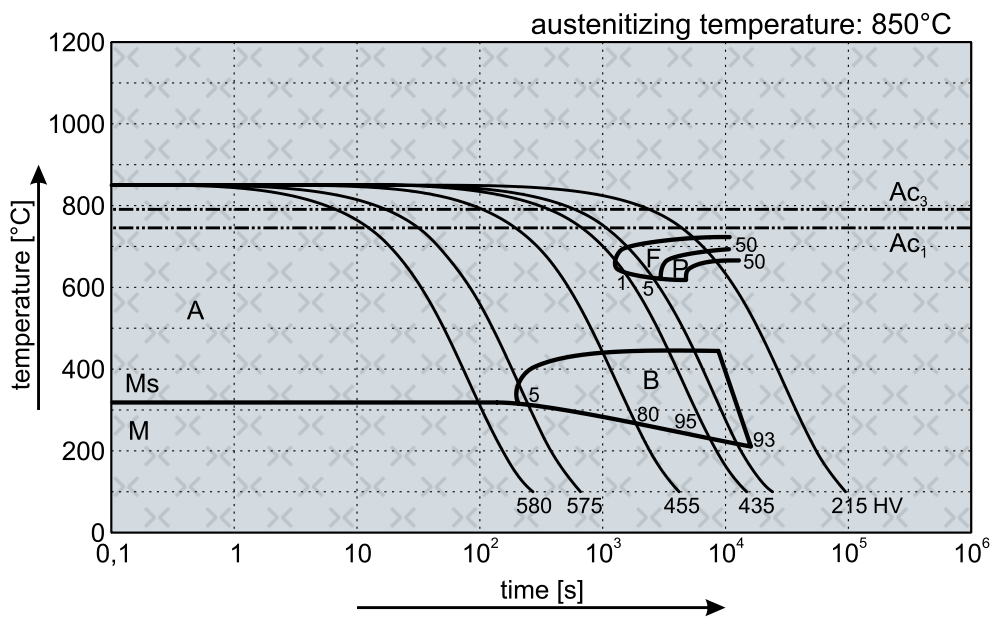

Tempering Diagram

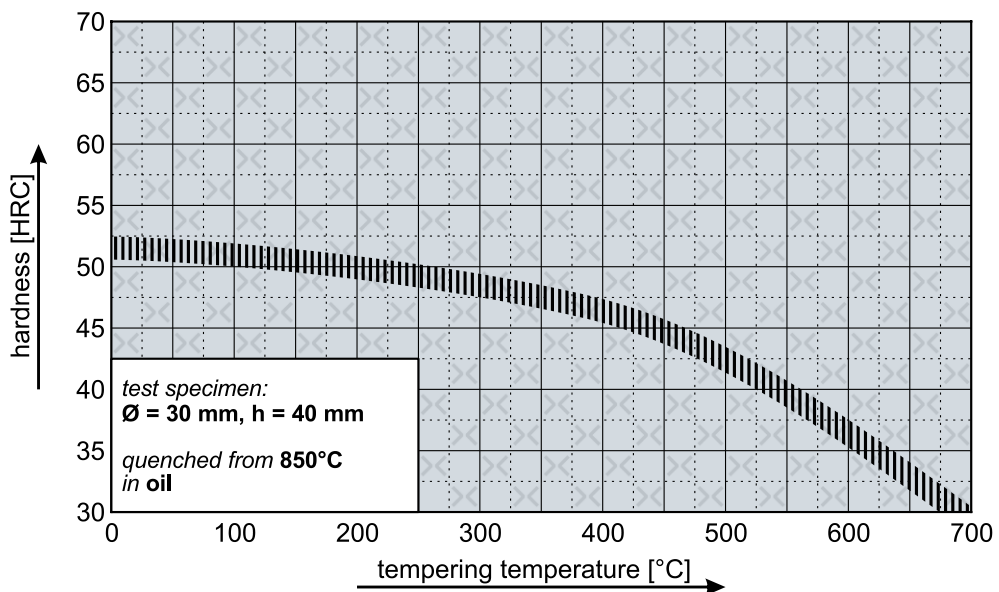

Remarks: All technical information is for reference only.